


COUTURE

PATTERNS



Bralette Berry

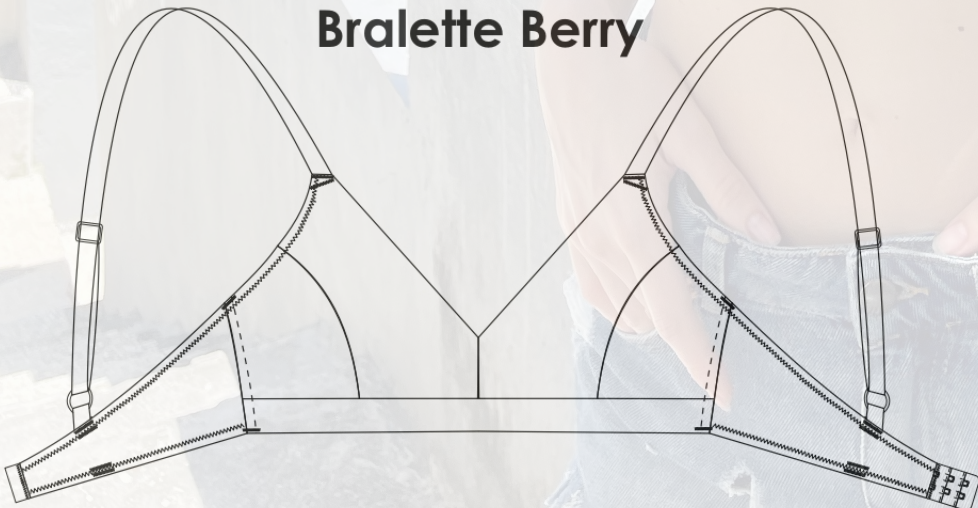

Difficulty ●●●●○ Advanced

IMPORTANT!

Permission to use patterns "Couture patterns":

- for personal use only. It is forbidden to send patterns "couture patterns" and patterns instructions to third persons, also post patterns and instructions in the public domain using the Internet and other digital networks. In accordance with the Law of the Republic of Belarus On Copyright and Related Rights of July 17, 2011 №262-3 ст.55 non-compliance of these rules is a violation of the current legislation in the field of copyright and the responsibility of the violator. Illegal use or distribution will be prosecuted in accordance with the legislation of the Republic of Belarus: Code of the Republic of Belarus On Administrative Violations of January 06, 2021 №91-3 and the Criminal Code of the Republic of Belarus dated July 09, 1999№275-3.
- for commercial purposes only when tailoring underwear to order, creating collections, provided that the patterns are used only in production without subsequent distribution to private individuals.

MODEL DESCRIPTION

Bralette is made entirely of elastic satin (synthetic silk)

A wide belt under the breast, made of satin and rubber band inside, has a supporting function besides the decorative one.

The plastic bones the side detail and gives additional support to the breast.

The Berry adjustable straps.




REQUIRED TOOLS AND SUPPLIES

1. Sewing machine
2. Steam iron
3. Tailor's around last for wet heat treatment of a bra
4. Ironing board

Also need tailor's needles, glue marker, ultra-fine pins, tailor's chack, rotary cutter (you can use regular scissors, but suggest using a rotary cutter to get the most precise cut), cutting mat

MATERIALS FOR SEWING

(CONSUMPTION OF MATERIALS FOR ALL SIZES)

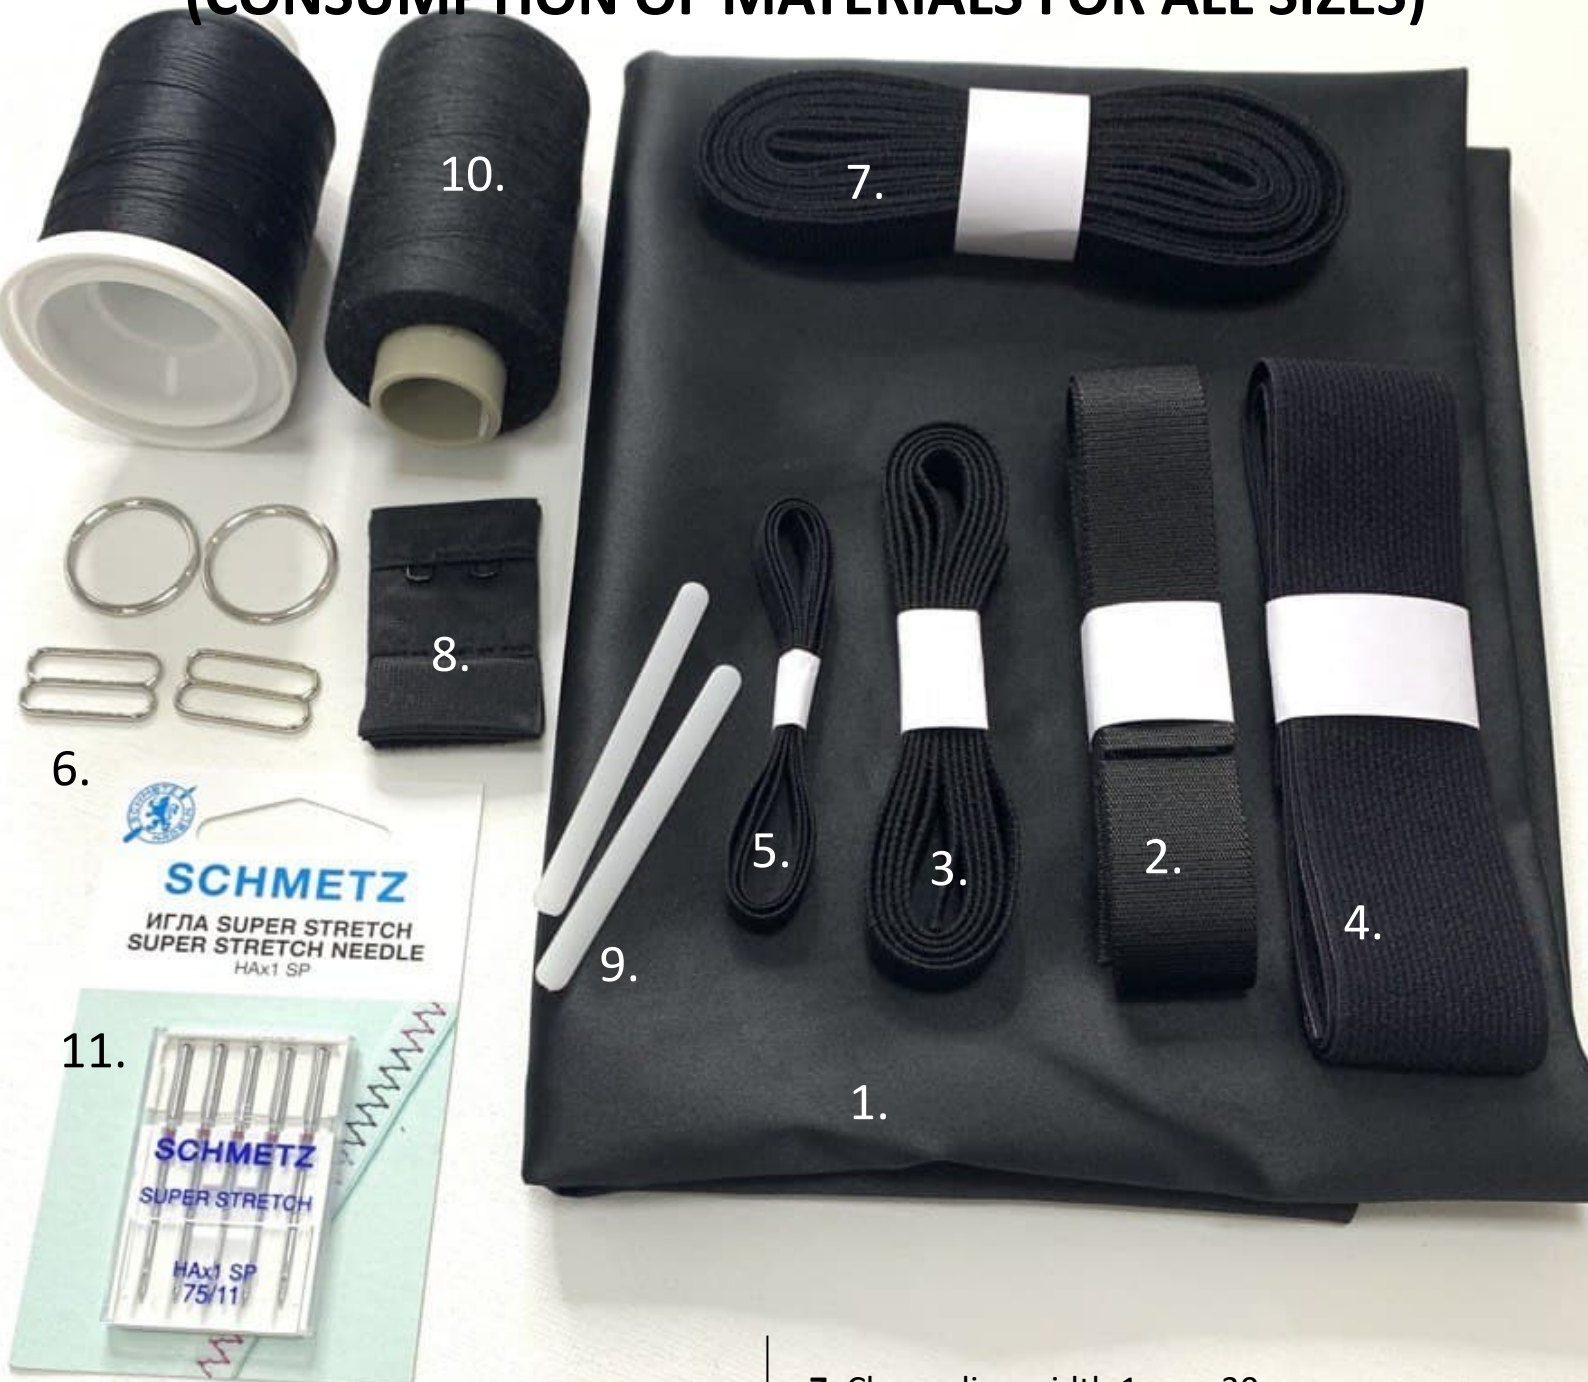

1. Stretch atlas (tensile coefficient 0.85 weft)
- 40 cm with a width of 1.2 m

2. Strap elastic width 1cm or 2cm - 1 m
(length of each strap 40 cm)

3. Band elastic width 0,8 or 1 cm - 1,5 m

4. Band ribbon width 3 cm - 40 cm

5. Band elastic width 0,6 cm - 50 cm

6. 2 rings, 2 sliders, width corresponding to
the width of the strap elastic

7. Channeling width 1 cm - 30 cm

8. Hook & eye closure 2.8 cm wide- 1 pcs.

9. Plastic bones length 8 cm - 2 pcs.

10. Reinforced sewing thread (thickness 100-
120) - 1 spool.

and/ or on the looper textured thread (thickness
160-240)- 1 spool.

11. Needles super stretch 75/11 or stretch
75/11

**STITCH UP ON THE EDGING
ELASTIC BAND ON THE LOWER
CUT OF THE BRA BELT IN THE
SECOND STAGE**

***Pay attention to the
placement of the edges
of the elastic band in re-
lation to the presser**



2 STAGE

Straighten the detail with
our hands so that there
are no tucks

The needle is set
strictly in the center
of the presser foot

Edge of elastic 1mm

Turning the elastic band to the wrong side of the bralette belt.

When stitching the elastic in the 2nd stage, we only stretch it a little.

We slightly straighten the detail with our hands so that unnecessary tucks do not form during stitching.