

# COOUTURE

## PATTERNS


BRIEFS

MOOD

Difficulty



Beginners

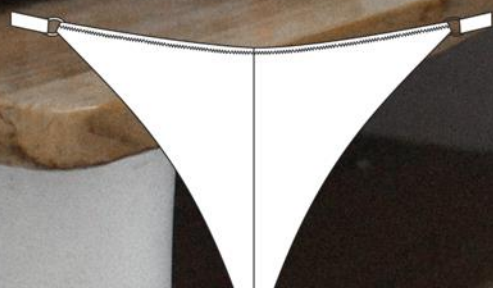

## **IMPORTANT!**

Permission to use patterns "Couture patterns":

- for personal use only. It is forbidden to send patterns "couture patterns" and patterns instructions to third persons, also post patterns and instructions in the public domain using the Internet and other digital networks. In accordance with the Law of the Republic of Belarus On Copyright and Related Rights of July 17, 2011 №262-3 ст.55 non-compliance of these rules is a violation of the current legislation in the field of copyright and the responsibility of the violator. Illegal use or distribution will be prosecuted in accordance with the legislation of the Republic of Belarus: Code of the Republic of Belarus On Administrative Violations of January 06, 2021 №91-3 and the Criminal Code of the Republic of Belarus dated July 09, 1999№275-3.
- for commercial purposes only when tailoring underwear to order, creating collections, provided that the patterns are used only in production without subsequent distribution to private individuals.

## MODEL DESCRIPTION

Charming Brazilian briefs with regulation. They are an essential element of wardrobe lingerie and will be invisible under clothes.

Made of stretch mesh and lace.

Two options for processing the upper of the briefs.

Luxurious gusset processing, no overlock.



## REQUIRED TOOLS AND SUPPLIES

1. Sewing machine
2. Steam iron
3. Ironing board

You will also need tailor's needles, thin pins, tailor's chalk, rotary cutter (normal scissors can be used, but we suggest using a rotary cutter for the most accurate cut), mat for cutting.

# MATERIALS FOR SEWING

## (CONSUMPTION OF MATERIALS FOR ALL SIZES)



1. Stretch lace fabric (tensile coefficient 0,70 grain line, 0,80 weft) - 20 cm with a width of 1,2 m (or lace stretch - 50 cm with a width of 18 cm with festoons on both sides)

\* we do not recommend using non-stretch lace

2. Stretch mesh (tensile coefficient 0,70 grain line, 0,80 weft) - 20 cm with a width of 1,2 m

3. Cotton fabric (knitted fabric) - 15\*15 cm

4. Elastic band width 0,8 - 1 cm - 2 m

5. Elastic band width 0,6 - 0,8 cm - 1 m

6. 4 rings, 2 sliders—width 1 cm (width corresponding to the width of the band elastic)

7. Reinforced sewing thread (thickness 100-120) - 1 spool and/ or on the looper textured thread (thickness 160-240)- 1 spool.

8. Needles Super stretch 75/11 or Stretch 75/11

\* use straight stitch -  
4.5 stitch length



Pin and sew on the sewing machine  
the side edges of the gusset and the  
briefs front detail, stepping back from  
the edge 1-2 mm

1-2 mm seam width

Set the stitch length 4.5

In order not to tighten the edge  
and it is possible to easily rip up  
the seam, of necessary.