

COUTURE

PATTERNS


Briefs

Basic

Difficulty



Beginners

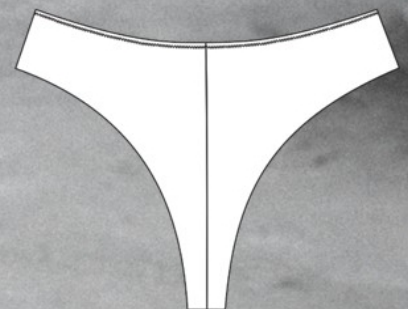

IMPORTANT!

Permission to use patterns "Couture patterns":

- for personal use only. It is forbidden to send patterns "couture patterns" and patterns instructions to third persons, also post patterns and instructions in the public domain using the Internet and other digital networks. In accordance with the Law of the Republic of Belarus On Copyright and Related Rights of July 17, 2011 №262-3 ст.55 non-compliance of these rules is a violation of the current legislation in the field of copyright and the responsibility of the violator. Illegal use or distribution will be prosecuted in accordance with the legislation of the Republic of Belarus: Code of the Republic of Belarus On Administrative Violations of January 06, 2021 №91-3 and the Criminal Code of the Republic of Belarus dated July 09, 1999№275-3.
- for commercial purposes only when tailoring underwear to order, creating collections, provided that the patterns are used only in production without subsequent distribution to private individuals.

MODEL DESCRIPTION

Brazilian panties are made of stretch mesh on the front detail and stretch satin on the back detail. Also these panties can be sewn entirely of stretch mesh, stretch satin, stretch lace or combine all these types of fabrics.

Fit relatively to the waistline—classic. The back detail of the panties in the fold.

Luxurious gusset processing, no overlock.



REQUIRED TOOLS AND SUPPLIES

1. Sewing machine
2. Steam iron
3. Ironing board

You will also need tailor's needles, thin pins, tailor's chalk, rotary cutter (normal scissors can be used, but we suggest using a rotary cutter for the most accurate cut), mat for cutting.

MATERIALS FOR SEWING

(CONSUMPTION OF MATERIALS FOR ALL SIZES)



1. Stretch mesh (tensile coefficient 0.70 grain line, 0,80 weft) - 30 cm with a width of 1,2 m
 2. Stretch atlas (tensile coefficient 0,85 weft) - 30 cm with a width of 1,2 m
- * It is also possible to sew these panties entirely of mesh, stretch satin, stretch lace or combine all of these types of fabrics.
3. Non-stretch mesh (tulle) - 5 cm in length and any width
 4. Cotton fabric (knitted fabric) - 15*15 cm
 5. Elastic band 0,6 –0,8 –1 cm- 2,5 m
 6. Reinforced sewing thread (thickness 100-120) - 1 spool. and/ or on the looper textured thread (thickness 160-240)- 1 spool.
 7. Needles super stretch 75/11 or stretch 75/11



Needle position relative to the edge of the presser 5 mm

* use triple stitch - 3.0 stitch length

5 mm—seam width

Stitch the side edge of the briefs front and back details with a triple line.

IMPORTANT!

Stitch, starting from the bottom edge, to get a smooth transition from the front to the back details.

